19016906AC

OVER-WALL


2-way Over-wall thermostatic wall tap with shower bar connection



· To complete with the rest of the shower parts.

· Inverter integrated into the flow regulator.

· Square handle.

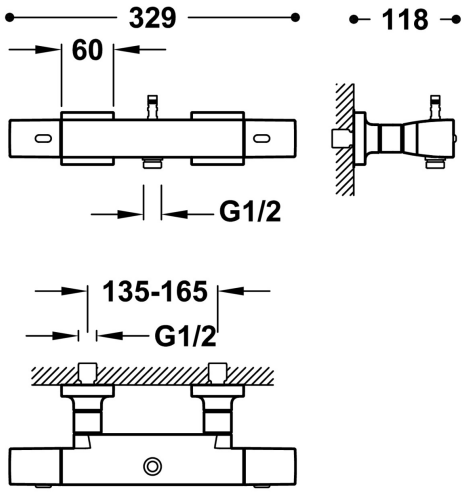

Steel Finish

Flow rate (l/min): 12

Environmental Quality Guarantee (Catalonia)

Distributor cartridge: 29928303

Easy-Clean®. The thermostatic cartridge is easy to clean without losing temperature calibration

Connecting element: MURAL G1/2"

Eccentricity (cm): 13-16

Acoustic group: IA

Tres Instant: The thermostatic cartridge ensures a constant flow of water at the desired temperature, in spite of pressure or temperature changes.

Material: Low lead content brass

N New

Corrosion resistance

Tres Touch-cool®. The tap surface remains at a temperature suitable for touching, thus preventing burns.